Datasheet

UP-cabinet

IN WALL CABINET

The up cabinet is designed and engineered to be a high-quality product with a long life span even in harsh environments. AP cabinets can also be mounted within other cabinets as separate sections in larger cabinet solutions.

Standard design

Material: The cabinets are made of aluminum sheets and profiles in a seawater-resistant alloy. The sides, door frame and attachment for the back plate consist of a aluminium profile.

IP rating: IP54, optional IP66

Corner joins: Fully welded with corner angles.

Painting and Colors: Polyester powder coating, standard is RAL 7032, other colors on request.

Design and options

- Choice of exterior and interior colors according to specification
- Windows in doors and panels
- Recesses for instruments and switches
- 19”/ETSI pivoting and fixed frames
- Air vents
- Wall mounts, pole mounts, racks, loose and welded-on mounting angles
- Plinth for all cabinet depths and widths
- Cable slots with aluminium/PVC cover plates and gasket
- Other locks, keys and fixed handles
- Opening at the bottom of the cabinet
- Front division with center post, doors and panels
- Earthing rails, fuse holder and form holder
- Mounting rails, mounting plates and fastening equipment
- Air conditioning equipment or cooling units

MEASUREMENTS AND DIMENSIONS

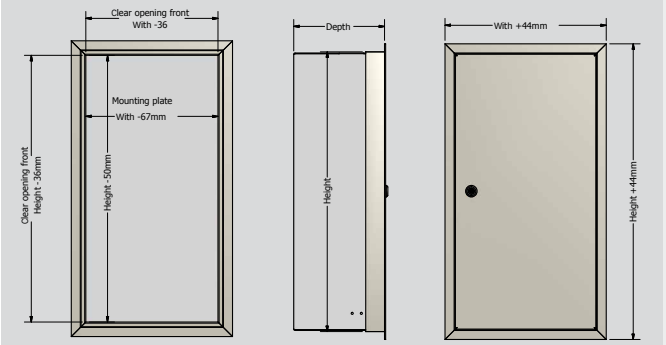

DIMENSIONS

With: 260 to 2000 mm.
Height: 260 to 2100 mm.
Depth: 75 to 800mm.

Tailoring

Hydal build the UP cabinet exactly to your needs.
Both outside and inside, you decide the design.